

ADA STANDARDS FOR ACCESSIBLE DESIGN



Mila International ADA compliant sinks, fully support an accessible and user friendly space.

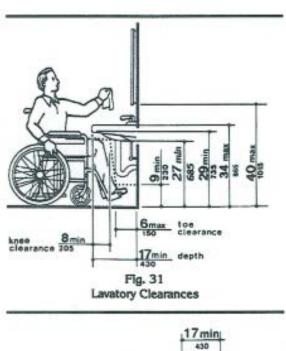



4.24 SINKS

- **4.24.1 General.** Sinks required to be accessible by 4.1 shall comply with 4.24.
- **4.24.2 Height.** Sinks shall be mounted with the counter or rim no higher than 34" (865 mm) above the finish floor.
- **4.24.3 Knee Clearance.** Knee clearance that is at least 27" (685 mm) high, 30" (760 mm) wide, and 19" (485 mm) deep shall be provided underneath sinks.
- **4.24.4 Depth.** Each sink shall be a maximum of 6-1/2" (165 mm) deep.
- **4.24.5 Clear Floor Space.** A clear floor space at least 30" by 48" (760 mm by 1,220 mm) complying with 4.2.4 shall be provided in front of a sink to allow forward approach. The clear floor space shall be on an accessible route and shall extend a maximum of 19" (485 mm) underneath the sink (see Fig.32)
- **4.24.6 Exposed Pipes and Surfaces.** Hot water and drain pipes exposed under sinks shall be insulated or otherwise configured so as to protect against contact. There shall be no sharp or abrasive surfaces under sinks.
- **4.24.7 Faucets.** Faucets shall comply with 4.27.4. Lever-operated, push-type, touch-type, or electronically controlled mechanisms are acceptable designs.